



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : A61M 16/00, A62B 7/04	A1	(11) International Publication Number: <b>WO 98/11930</b> (43) International Publication Date: 26 March 1998 (26.03.98)
--	----	--

(21) International Application Number: PCT/US97/16632


(22) International Filing Date: 18 September 1997 (18.09.97)

(30) Priority Data:  
08/710,682 23 September 1996 (23.09.96) US(71) Applicant: RESPIRONICS, INC. [US/US]; 1501 Ardmore  
Boulevard, Pittsburgh, PA 15221-4401 (US).(72) Inventors: ZDROJKOWSKI, Ronald, J.; 622 Cascade Road,  
Pittsburgh, PA 15221 (US). STARR, John, R.; 4531  
Melwood Road, Leechburg, PA 15656 (US). MICELI,  
Joseph, M.; 4850 Hialeah Drive, Pittsburgh, PA 15239 (US).(74) Agent: GASTINEAU, Cheryl, L.; Reed Smith Shaw & McClay  
LLP, P.O. Box 488, Pittsburgh, PA 15230 (US).(81) Designated States: European patent (AT, BE, CH, DE, DK,  
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).**Published***With international search report.*

(54) Title: PRESSURE SENSITIVE FLOW CONTROL VALVE

## (57) Abstract

A pressure sensitive valve (20) for a positive pressure airway system (10) which allows bi-directional flow with low resistance. When positive pressure from the air generator (12) of the positive pressure airway system (10) is lost, a spring (28) actuated disc (32) moves away from its compressed position to block the outlet of the air generator (12). By blocking the outlet of the air generator (12), the path of entry for contaminants is significantly restricted in so doing, an alternate, low resistance path to atmosphere is exposed to allow contaminants to escape.

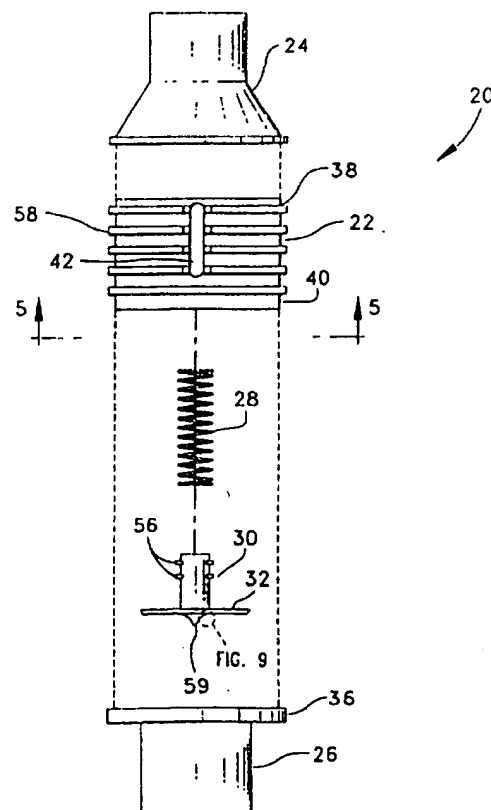

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

TITLE

PRESSURE SENSITIVE FLOW CONTROL VALVE

FIELD OF THE INVENTION

5       The present invention relates to providing a valve at the outlet of a positive airway pressure (PAP) device such as a continuous positive airway pressure (CPAP) device or bi-level positive airway pressure (BiPAP) device for preventing contaminants from entering the device.

BACKGROUND OF THE INVENTION

10       Sleep apnea syndrome is due to episodic upper airway obstruction during sleep. As a consequence, there is severe interruption of sleep in the patient. Positive airway pressure devices, such as CPAP, and bi-level positive airway pressure devices have been developed to  
15       treat this disorder. CPAP devices deliver positive air pressure to the nasal passages of patients during sleep in order to maintain their airways in a continuously open state. In BiPAP therapy, pressure is applied alternately at relatively higher and lower prescription pressure  
20       levels.

      A typical PAP device comprises a flow generator (e.g., a blower) which receives air from any suitable source such as a pressurized bottle or the ambient atmosphere. The gas flow from the flow generator is passed  
25       via a delivery conduit to a patient interface such as a mask.

Humidifiers have been developed for use with PAP devices to humidify the air supplied to the patient. A typical humidifier comprises a water reservoir connected in series with the delivery conduit between the flow generator and the patient interface. A problem associated with these humidifiers is the possibility of water from the humidifier entering the PAP device through the delivery conduit and potentially causing damage to the device.

Many PAP devices are also used in combination with a therapeutic gas such as oxygen which is generally delivered at the patient end of the delivery conduit. A problem associated with the use of therapeutic gas is when positive pressure from the flow generator is lost, the therapeutic gas will flow through the delivery conduit to the PAP device potentially causing damage to the device.

#### SUMMARY OF THE INVENTION

The pressure sensitive flow control valve of the present invention has been developed to overcome the problem of water from a humidifier and other contaminants from entering the PAP device by blocking the outlet of the PAP device to restrict the path of entry for the contaminants. Also, the valve prevents the flow of gas, in the absence of positive pressure, back into the PAP device or ventilator by providing a low resistance exit path to atmosphere for any gas or water in the patient circuit.

The principal advantage of the present invention is realized by providing a pressure sensitive flow control valve at the outlet of a PAP unit to prevent contaminants from entering the PAP unit when positive pressure is lost.

The present invention provides a pressure sensitive flow control valve for a PAP system. While the system is at pressure, the valve allows bi-directional flow with low resistance. When positive pressure is lost, a spring actuated disc moves away from its normal position to block the outlet of the PAP unit. This valve will allow reverse flow as long as there is sufficient pressure. However, if there is not adequate pressure in the valve, indicating that the PAP unit is not functioning, the valve acts much like a one way valve to prevent reverse flow.

The valve of the presently preferred embodiment of the present invention comprises a valve top cap, a valve bottom cap, a valve body disposed between the valve top cap and the valve bottom cap, a valve stem/disc and a spring. All of the components, with the exception of the spring, preferably are polycarbonate components ultrasonically welded together. But those skilled in the art will appreciate that other manufacturing materials and methods are possible.

Other details, objects and advantages of the present invention will become apparent as the following description of the presently preferred embodiments proceeds.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention will become more readily apparent from the following description of preferred embodiments thereof shown, by way of example only, in the accompanying drawings, wherein:

Figure 1 is a view schematically illustrating a PAP system incorporating the pressure sensitive valve of the present invention;

5           Figure 2 is a perspective view of the pressure sensitive valve;

Figure 3 is a side view of the pressure sensitive valve;

Figure 4 is an end view of the valve illustrated in Figure 3 as seen from line 4-4 of that figure;

10           Figure 5 is an end view of the valve body as shown in the direction of line 5-5 in Figure 3;

Figure 6 is an exploded side view of the pressure sensitive valve;

15           Figure 7 is a cross-sectional side view of the valve illustrated in Figure 4 as seen from line 7-7 of that figure illustrating the position of the disc in the absence of positive pressure;

20           Figure 8 is a cross-sectional side view of the valve illustrated in Figure 4 as seen from line 8-8 of that figure illustrating the position of the disc in the presence of positive pressure; and

Figure 9 is a close-up view illustrating details of the disc.

DETAILED DESCRIPTION OF THE INVENTION

Turning to the drawings, a schematic drawing of a PAP system 10 is shown in Figure 1 which includes a flow generator 12 which delivers gas flow via a delivery conduit 14 to a patient interface 16 such as a mask. Typically a humidifier 18 is disposed in line with the delivery conduit 14 between the flow generator 12 and the patient interface 16. The patient interface 16 may include an inlet 19 for the administration of a therapeutic gas such as O<sub>2</sub>. In accordance with the present invention a pressure sensitive flow control valve 20 is located at the outlet of the flow generator 12 at the end of the delivery conduit 14 opposite the patient interface 16.

The details of a pressure sensitive flow control valve 20 in accordance with a presently preferred embodiment of the present invention are shown in Figures 2-9. The valve 20 includes a valve body 22, valve top cap 24, a valve bottom cap 26, a spring 28 and a valve stem/disc 30/32 as shown in Figure 3.

The valve top cap 24, as shown in Figure 3, is generally cylindrical in shape having a conical end 34 which attaches to the valve body 22. The valve top cap 24 acts as an outlet port to the valve. Valve bottom cap 26, which acts as a supply port to the valve, is also generally cylindrical in shape and has an annular flared portion 28 which attaches to the valve body 22.

The valve body 22, as seen in Figure 6, is generally cylindrical in shape and has a top end 38 for attachment to the valve top cap 24 and a bottom end 40 for attachment to the valve bottom cap 26. Exhaust ports 42,

as shown in Figures 5 and 8, extend radially from an internal conical chamber 44 to the outer surface of the cylindrical body 22. In the preferred embodiment three exhaust ports 42 are shown. Internal conical chamber 44 (Figures, 5, 7 and 8) extends from the top end to the bottom end and has a central cylindrical guide 48 concentrically disposed within the internal conical chamber 44. The top end 50 of the central cylindrical guide 48 is closed and the bottom end 52 preferably is open such that a spiral spring 28 is insertable inside. The central cylindrical guide 48 preferably has three slits 54 (Figure 5) which serve as guides for protrusions 56 on the valve stem/disc 30/32. The body 22 also preferably has horizontal ribs 58 on the outside of the body 22 to make it difficult to block the exhaust ports 42 with tape by an untrained user.

The valve stem/disc 30/32 has a stem portion which is adapted to fit inside the cylindrical guide 48 of the valve body 22. An end of the stem portion engages the spring 28 within the cylindrical guide 48, protrusions 56 on the valve stem portion project through the slits 54 in the central cylindrical guide 48 to guide the valve stem as it moves relative to the central cylindrical guide 48. The protrusions 56 are preferably in the form of two rows of fingers but may also be rib-like.

The spring 28 is preferably a spiral spring designed to provide adequately constant force throughout the travel range, giving the valve 20 a sharper response characteristic at precisely the desired pressure condition. The slits 54 are preferably offset 60° from the exhaust ports 42 to prevent unwanted tampering with the internal parts by users.



Integral with the valve stem portion is a valve disc portion located on an end opposite to the spring engaging end. The disc preferably has a centralized conical portion 59 and aerodynamic curves 60 (Figure 9) to  
5 reduce flow resistance.

In normal operation, pressurized air from the PAP unit 10 enters the valve 20 through the valve bottom cap 26 and engages the disc against the work of the spring 28 (Figure 8). The centralized conical portion and  
10 aerodynamic curves of the disk reduce flow resistance such that the pressurized air flows across the disc, around the outside of the internal conical chamber 44 and out through the valve top cap 24 which is connected to the delivery conduit 14 for delivery of the air to the patient through  
15 the patient interface 16. While the system is at pressure, the valve 20 also allows reverse flow into the positive airway pressure device. In the absence of pressurized air (Figure 7), the spring 28 pushes the disc against the annular flared portion 36 of the valve bottom cap 26 to  
20 seal off the entry of air or any contaminants into the PAP unit 10. Air or contaminants which enter into the valve 20 when positive air pressure is lost, enter through the valve top cap 24, flow around the outside of the internal conical chamber 44, into the inside of the internal conical  
25 chamber 44 to exit the exhaust ports 42 which are open to atmosphere.

While a presently preferred embodiment is shown and described, many variations are within the scope of the present invention. For example, the disc may be formed  
30 from a flexible material or formed from a metal such that it may be actuated by pressure as well as magnetic attraction. A floating ball, which is movable back and

forth may be used instead of a disk to block the outlet ports to the PAP unit and atmosphere.

5        Although the invention has been described for the purpose of illustration, it is to be understood that such detail is solely for that purpose and that variations can be made therein by those skilled in the art without departing from the spirit and scope of the invention except as it may be limited to the claims.

CLAIMSWHAT IS CLAIMED IS:

1. A pressure sensitive flow control valve provided in a portion of a breathing gas delivery circuit, said delivery circuit adapted to be maintained at a first pressure that is greater than an atmospheric pressure outside said delivery circuit, said valve comprising:

a valve body;

a supply port defined in a first portion of said valve body;

an outlet port defined in a second portion of said valve body;

at least one exhaust port defined in a third portion of said valve body; and

directing means disposed within said valve body for controlling a flow of gas through said valve body based on said first pressure in said delivery circuit relative to said atmospheric pressure such that if said first pressure in said delivery circuit is greater than said atmospheric pressure, said directing means provides a first configuration within said valve body that permits a two-way flow of gas through said valve body between said supply port and said outlet port and blocks said at least one exhaust port so that substantially no gas flows through said at least one exhaust port, and if said first pressure in said delivery circuit is not substantially

greater than said atmospheric pressure, said directing means provides a second configuration within said valve body that permits substantially all gas entering said valve body through said outlet port to exit said valve body through said at least one exhaust port, thereby substantially preventing contaminants from passing through said valve body from said outlet port to said supply port.

2. The pressure sensitive flow control valve of claim 1, wherein said directing means blocks said supply port if said first pressure in said delivery circuit is not substantially greater than said atmospheric pressure.

3. The pressure sensitive flow control valve of claim 2, wherein said directing means comprises a disc biased by a spring operatively coupled to said valve body.

4. The pressure sensitive flow control valve of claim 3, said directing means further comprising an internal chamber disposed within said valve body, said internal chamber being sized relative to said valve body such that gas flows between an exterior of said internal chamber and a wall defining said valve body, said at least one exhaust port providing a path between an area within said internal chamber an area outside said valve such that, if said first pressure in said delivery circuit is not substantially greater than said atmospheric pressure, gas entering said valve through said supply port flows around said exterior of said internal chamber before entering said internal chamber

and exists said valve through said at least one exhaust port.

5           5.    The pressure sensitive flow control valve of claim 4, wherein said internal chamber is conical in shape and oriented relative to said outlet port such that an apex of said conical shape faces said outlet port to provide an aerodynamic flow of gas around said exterior of said internal chamber.

10           6.    The pressure sensitive flow control valve of claim 4, wherein said disc includes a disc stem that contacts said spring.

15           7.    The pressure sensitive flow control valve of claim 6, further comprising a cylindrical guide disposed within said internal chamber, said cylindrical guide having at least one guide slit defined therein.

            8.    The pressure sensitive flow control valve of claim 7, wherein said spring is disposed within said cylindrical guide.

20           9.    The pressure sensitive flow control valve of claim 8, wherein said disc stem includes at least one protrusion adapted to engage said at least one slit to guide back and forth movement of said disc stem within said cylindrical guide.

25           10.   The pressure sensitive flow control valve of claim 9, wherein said at least one guide slit is offset with respect to said at least one exhaust port.

11. The pressure sensitive flow control valve of claim 4, wherein said disc includes a conical portion and aerodynamic curves to reduce flow resistance.

5 12. The pressure sensitive flow control valve of claim 1, further comprising ribs disposed on an exterior of said valve body so as to prevent complete blockage of said at least one exhaust port.

10 13. A pressure sensitive flow control valve provided in a portion of a breathing gas delivery circuit, said delivery circuit adapted to be maintained at a first pressure that is greater than an atmospheric pressure outside said delivery circuit, said valve comprising:

15 a valve body having a central cavity defined therein;

a supply port defined in a first portion of said valve body;

an outlet port defined in a second portion of said valve;

20 a chamber disposed within said central cavity such that said chamber does not move relative to said valve body and such that gas flows between an exterior of said chamber and said valve body, said chamber having a second cavity defined therein and a first opening  
25 communicating said second cavity with said central cavity;

at least one exhaust port communicating said second cavity of said chamber with an area outside said valve body;

5 a valve member adapted to substantially prevent gas from flowing from said central cavity to said second cavity responsive to said valve member being in a first position and to permit gas to flow from said central cavity to said second cavity responsive to said valve member being in a second position; and

10 a biasing mechanism adapted to urge said valve member into said second position responsive to said first pressure in said delivery circuit being not substantially greater than said atmospheric pressure and adapted to permit said valve member to move to said first position  
15 responsive to said first pressure in said delivery circuit being greater than said atmospheric pressure.

14. The pressure sensitive flow control valve of claim 13, wherein said valve member further substantially prevents gas from flowing from said central  
20 cavity through said supply port responsive to said valve member being in said second position and permits gas to flow from said supply port to said central cavity responsive to said valve member being in a first position.

25 15. The pressure sensitive flow control valve of claim 13, wherein said valve body has a diameter that is greater than a diameter of a delivery conduit connected to said supply port and said a delivery conduit connect to said outlet port, said diameter of said valve

body tapering downward in a direction toward said outlet port.

5 16. The pressure sensitive flow control valve of claim 13, further comprising external ribs disposed on an exterior portion of said valve body including said at least one exhaust port to substantially prevent obstruction of said at least one exhaust port.

10 17. The pressure sensitive flow control valve of claim 13, wherein said valve member comprises a valve disc and a valve stem coupled to said valve disc, said valve disc being sized and shaped so as to block gas flow between said central cavity and said supply port responsive to said valve member being in said second position, and wherein said biasing mechanism comprises a spring engaging a portion of said chamber and a portion of said valve member.

20 18. The pressure sensitive flow control valve of claim 17, further comprising a cylindrical guide disposed within said chamber, said cylindrical guide having at least one guide slit defined therein.

19. The pressure sensitive flow control valve of claim 18, wherein said spring is disposed within said cylindrical guide.

25 20. The pressure sensitive flow control valve of claim 19, wherein said valve stem includes at least one protrusion adapted to engage said at least one slit to guide axial movement of said valve stem within said cylindrical guide.



21. The pressure sensitive flow control valve of claim 18, wherein said at least one guide slit is offset with respect to said at least one exhaust port.

5 22. The pressure sensitive flow control valve of claim 17, wherein said valve disc includes a conical portion and aerodynamic curves to reduce flow resistance.

10 23. The pressure sensitive flow control valve of claim 13, wherein said chamber is conical shaped such that a diameter of said chamber tapers downward in a direction generally toward said outlet port.

24. breathing gas delivery system comprising:

a flow generator that outputs a breathing gas at a first predetermined pressure;

15 a delivery circuit having a first end operatively coupled to an output of said flow generator and a second end, said flow generator maintaining said delivery circuit at substantially said first predetermined pressure during operation of said flow generator; and

20 a patient interface operatively coupled to said second end of said delivery circuit for connecting said second end of said delivery circuit to said patient,

said delivery circuit including a pressure sensitive flow control valve comprising:

25 a valve body,

a supply port defined in a first portion of said valve body and adapted to receive breathing gas output by said flow generator,

5 an outlet port defined in a second portion of said valve body,

at least one exhaust port defined in a third portion of said valve body, and

directing means disposed within said valve body for controlling a flow of gas through said valve body  
10 based on said first pressure in said delivery circuit relative to an atmospheric pressure outside said delivery circuit such that if said first pressure in said delivery circuit is greater than said atmospheric pressure, said directing means provides a first configuration within  
15 said valve body that permits a two-way flow of said gas through said valve body between said supply port and said outlet port and blocks said at least one exhaust port so that substantially no gas flows through said at least one exhaust port, and if said first pressure in said delivery  
20 circuit is not substantially greater than said atmospheric pressure, said directing means provides a second configuration within said valve body that permits substantially all gas entering said valve body through said outlet port to exit said valve body through said at  
25 least one exhaust port, thereby substantially preventing contaminants from passing through said valve body from said outlet port to said supply port.

25. breathing gas delivery system comprising:

a flow generator that outputs a breathing gas at a first pressure;

5 a delivery circuit having a first end operatively coupled to an output of said flow generator and a second end, said flow generator maintaining said delivery circuit at substantially said first predetermine pressure during operation of said flow generator; and

10 a patient interface operatively coupled to said second end of said delivery circuit for connecting said second end of said delivery circuit to said patient,

said delivery circuit including a pressure sensitive flow control valve comprising:

a valve body having a central cavity defined therein;

15 a supply port defined in a first portion of said valve body;

an outlet port defined in a second portion of said valve;

20 a chamber disposed within said central cavity such that said chamber does not move relative to said valve body and such that gas flows between an exterior of said chamber and said valve body, said chamber having a second cavity defined therein and a first opening communicating said second cavity with said central  
25 cavity;

at least one exhaust port communicating said second cavity of said chamber with an area outside said valve body;

5 a valve member adapted to substantially prevent gas from flowing from said central cavity to said second cavity responsive to said valve member being in a first position and to permit gas to flow from said central cavity to said second cavity responsive to said valve member being in a second position; and

10 a biasing mechanism adapted to urge said valve member into said second position responsive to said first pressure in said delivery circuit being not substantially greater than an atmospheric pressure outside said delivery circuit and adapted to permit said valve member  
15 to move to said first position responsive to said first pressure in said delivery circuit being greater than said atmospheric pressure.

1 / 6

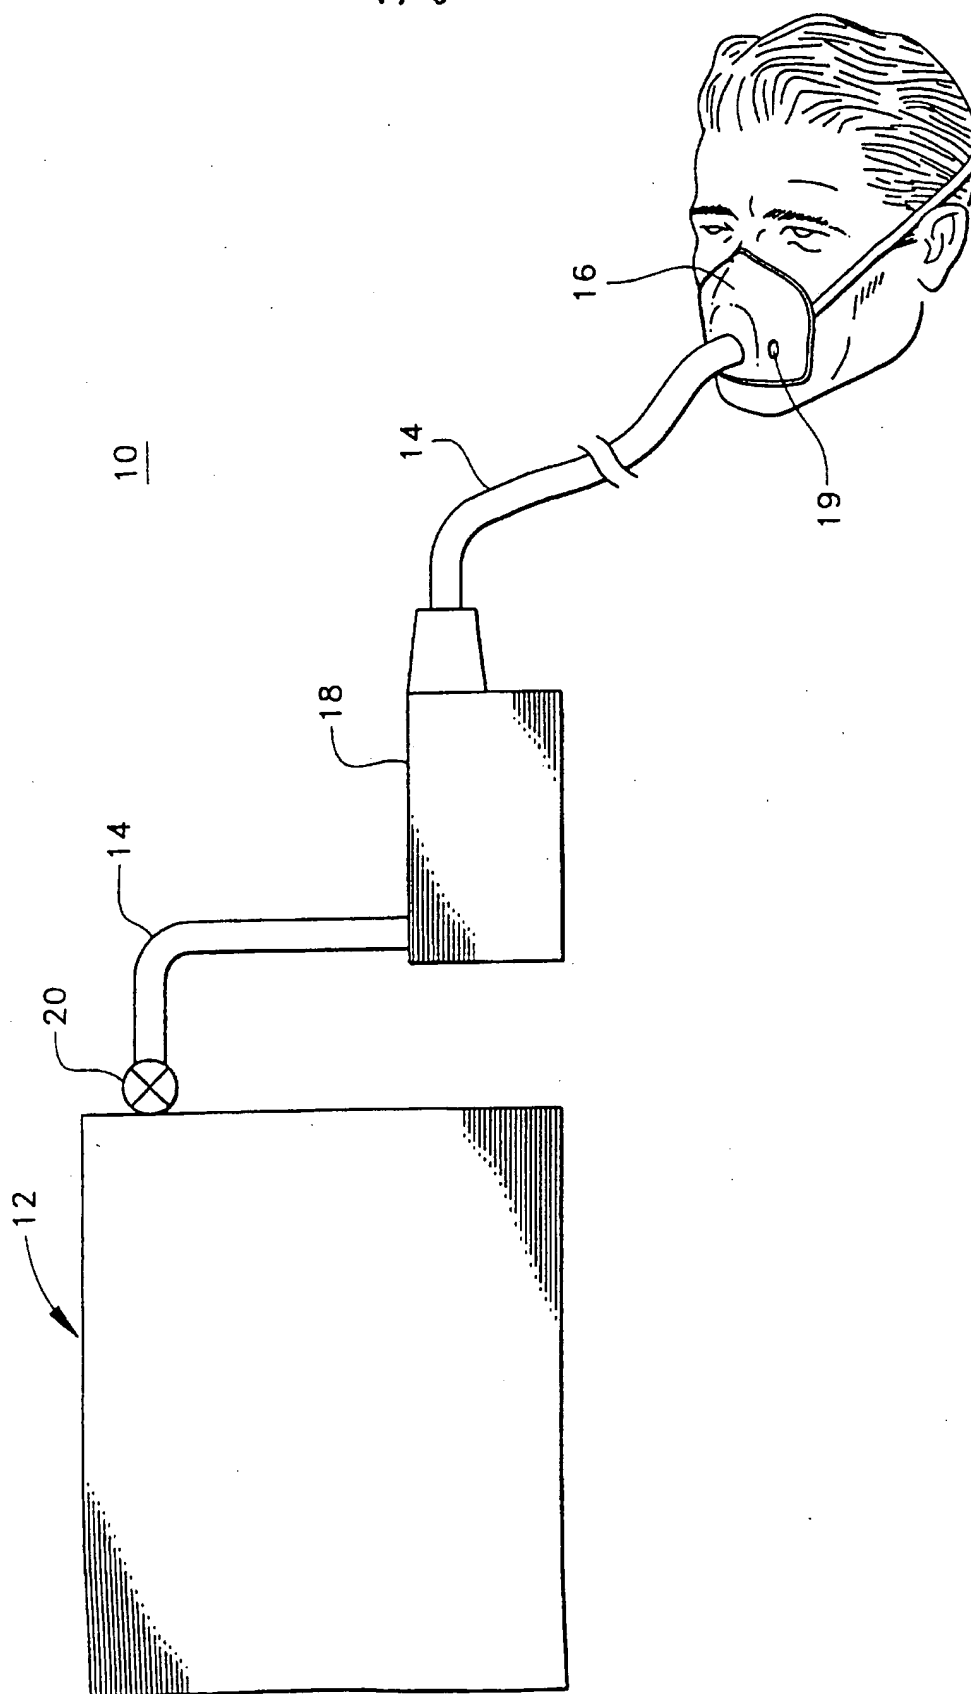
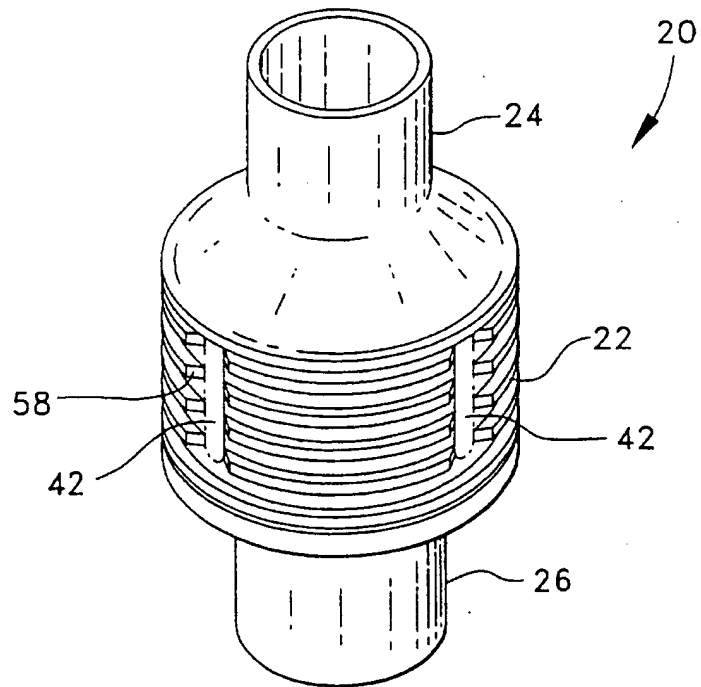


FIG. 1

2 / 6

*FIG. 2*

3 / 6

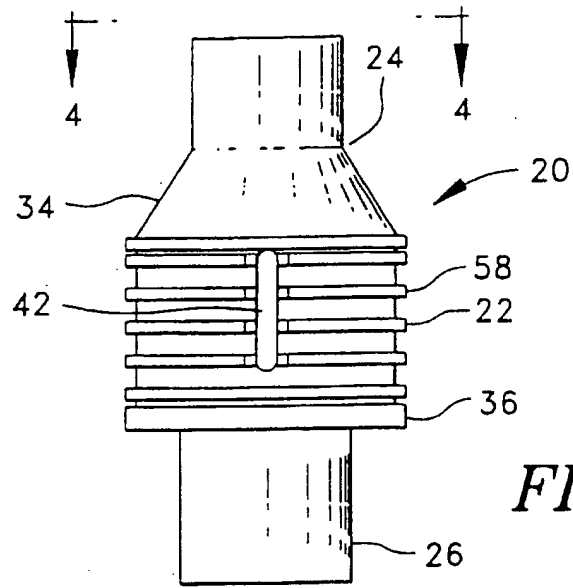


FIG. 3

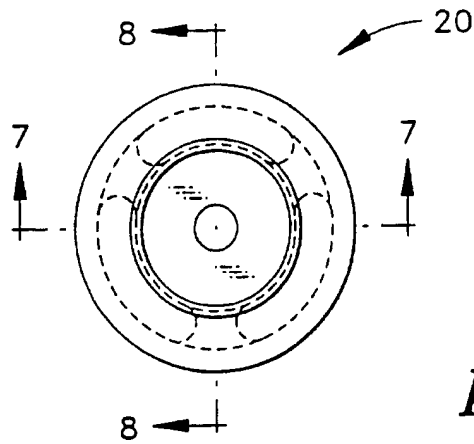


FIG. 4

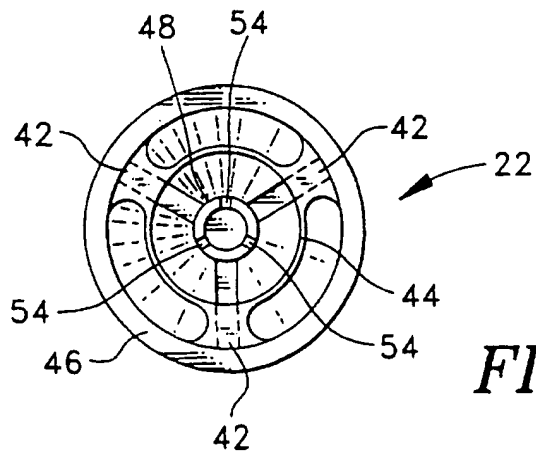


FIG. 5

4 / 6

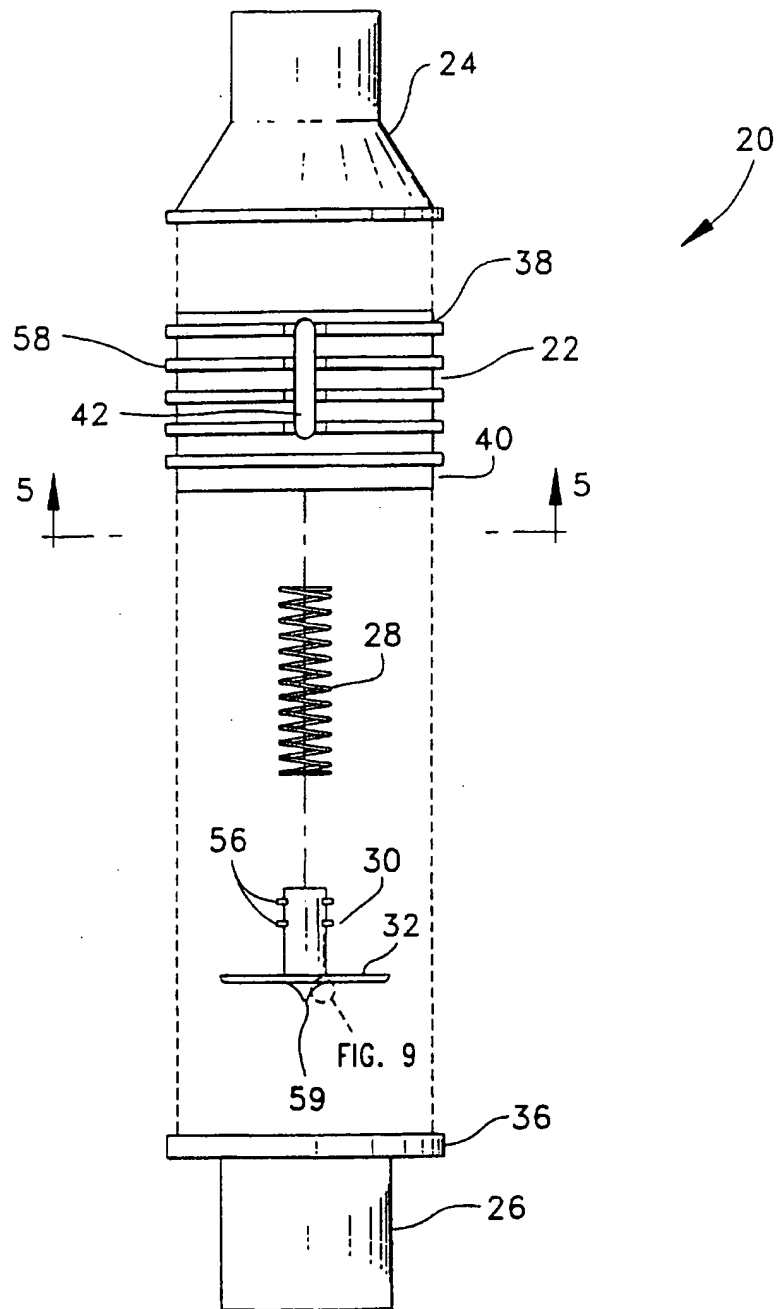
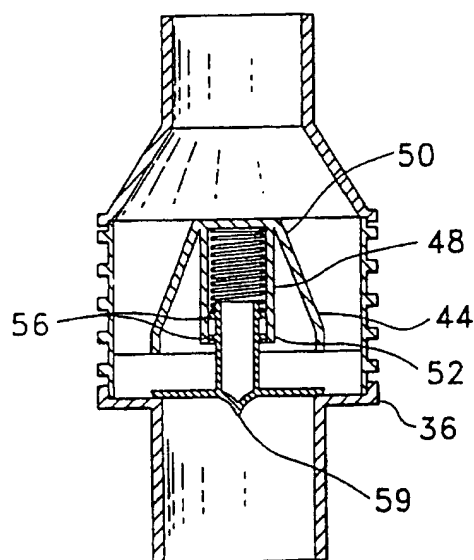
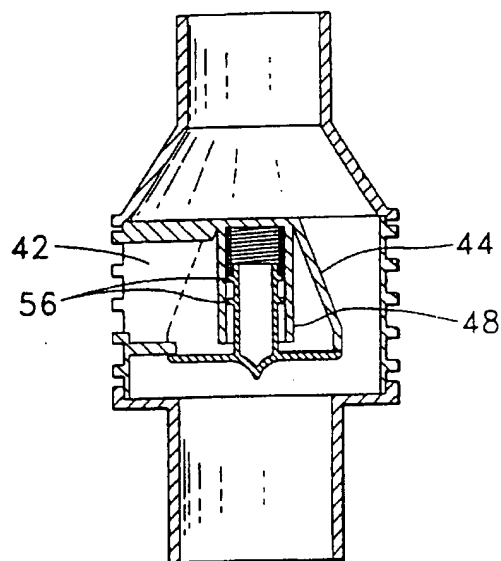


FIG. 6

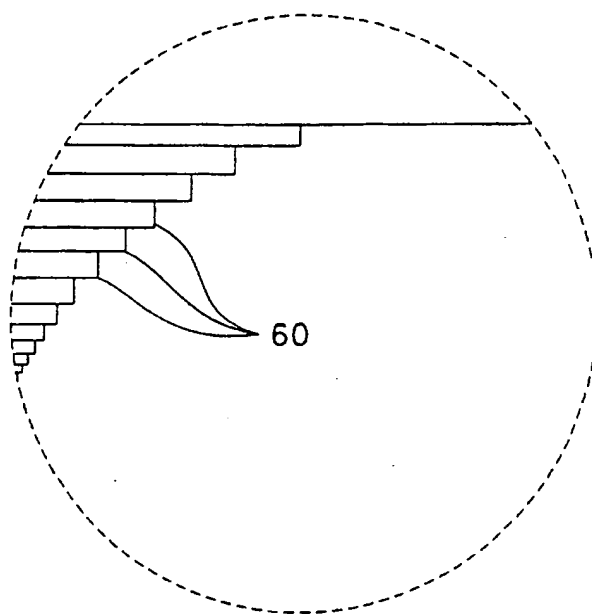




*FIG. 7*



*FIG. 8*



*FIG. 9*

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US97/16632

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : A61M 16/00, A62B 7/04

US CL : 128/203.11, 202.28, 202.29, 204.23, 205.24, 207.12, 207.16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 128/203.11, 205.24, 202.28, 202.29, 204.23, 207.12, 207.16

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,398,673 A (LAMBERT) 21 March 1995, col. 2 line 48 to col. 3 line 4.	1-25
Y	US 5,562,093 A (GERSON) 06 September 1995, col. 2, lines 59 to col. 3 line 9.	1-25

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	* T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
* A		document defining the general state of the art which is not considered to be of particular relevance
* E		earlier document published on or after the international filing date
* L		document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
* O		document referring to an oral disclosure, use, exhibition or other means
* P		document published prior to the international filing date but later than the priority date claimed
	* X	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
	* Y	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
	* A	document member of the same patent family

Date of the actual completion of the international search

24 NOVEMBER 1997

Date of mailing of the international search report

12 DEC 1997

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

VIRENDRA SRIVASTAVA

Telephone No. (703) 308-0959